


Configurable 2.4G Mesh Smart Switch




Important: Read All Instructions Prior to Installation

Function introduction

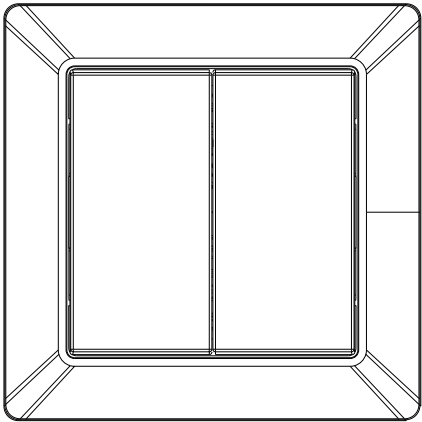

Front side


With Plastic Frame

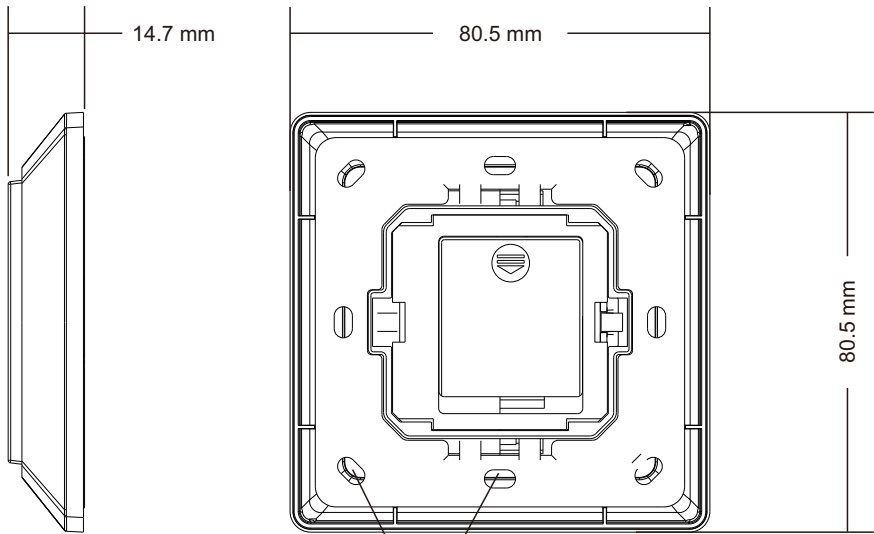

The remote control can be fixed on the wall with 3M glue or screw.

Back side

With Glass Frame

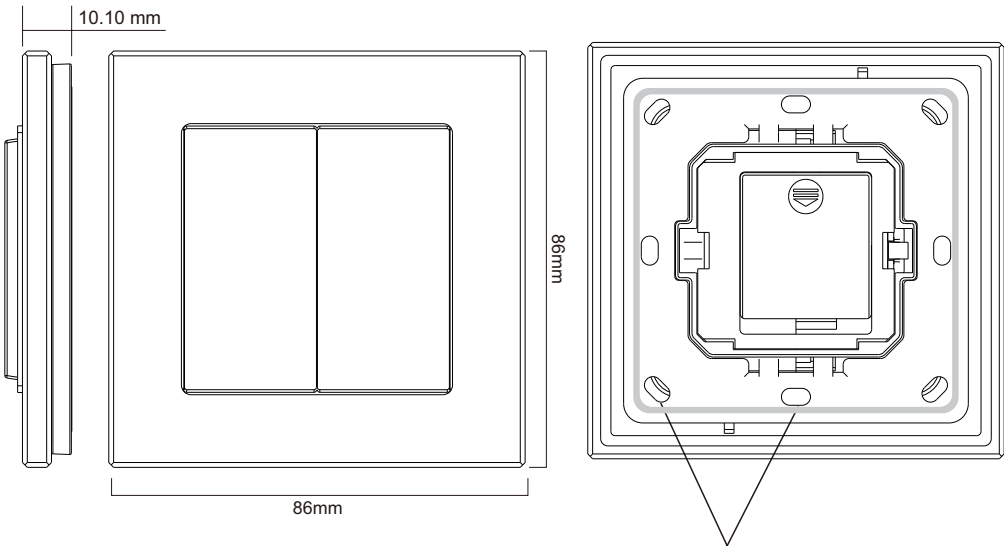


The remote control can be fixed on the wall with 3M glue or screw.

Product Data

Protocol	2.4G Mesh
Number of Buttons	4
Power Supply	3VDC(1xCR2430 battery)
Transmission Frequency	2.4GHz
Transmission Range (free field)	30m
Protection Type	IP20
Dimming Range	0.1%-100%
Dimensions	80.5x80.5x14.7mm / 86x86x14mm

- Configurable 2.4G mesh smart wall switch with 4 buttons
- Battery powered, ultra low power consumption
- Easy & quick pairing to the 2.4G mesh receivers by simply pushing the buttons
- Configurable through EasyThings APP with numerous functions
- Enables to control ON/OFF, brightness, CCT, RGB colors
- Enables to trigger preset dynamic color sequences, preset scenes or saved scenes in EasyThings APP
- Mesh network for further control distance, receivers can transmit signal to each other
- 2.4 GHz global operation
- The controlled receiver status can be quickly synchronized to the smart APP
- Transmission range between every two neighbor devices up to 30m
- Each receiver can be paired to max. 8 remote controls
- Enables to control universal DIM, CCT, RGB, RGBW and RGB+CCT 2.4G mesh light devices
- Standard size, compatible with existing EU size frame


Key function configuration

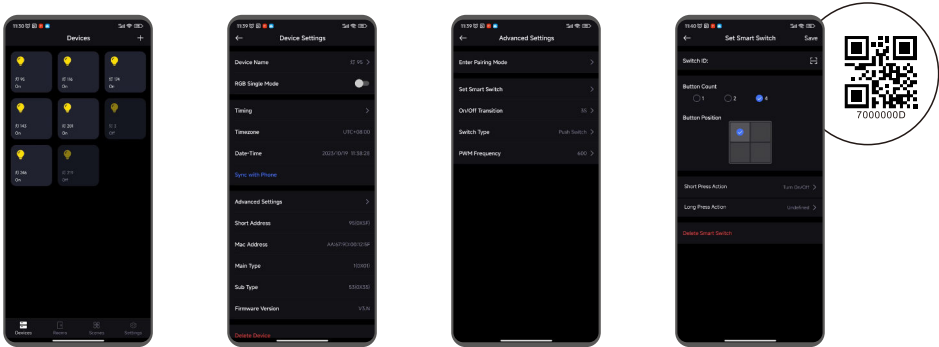

1. Press and hold the light device icon you would like to bind with the panel
2. Tap “Advanced Settings”
3. Tap “Set Smart Switch”
4. Tap  to scan the QR code on the back of the panel. Then choose the button count, and set the button function.

Note: before switch to the next button, any setting needs to be saved.

Installation

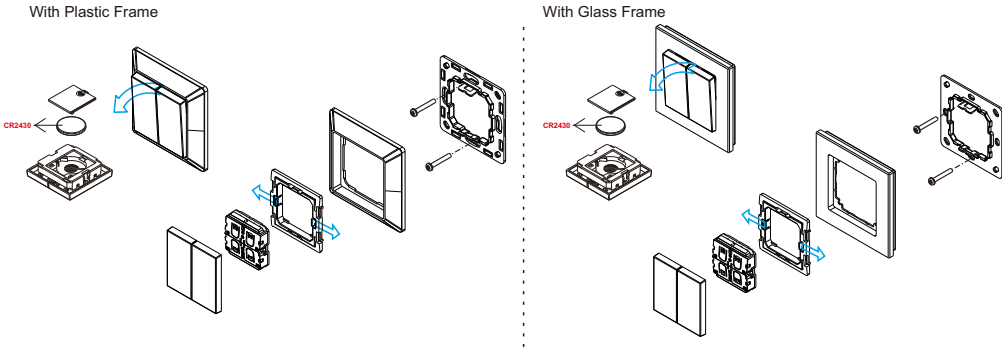

The key part of this controller is a universal, extremely rotary standard switch element that can be integrated in numerous frames by different manufactures as below list:

BERKER	S1, B1, B3, B7 glass
GIRA	Standard55, E2, Event, Esprit
JUNG	A500, Aplus
MERTEN	M-smart, M-Arc, M-Plan