



2.4G Mesh CCT Remote Controller

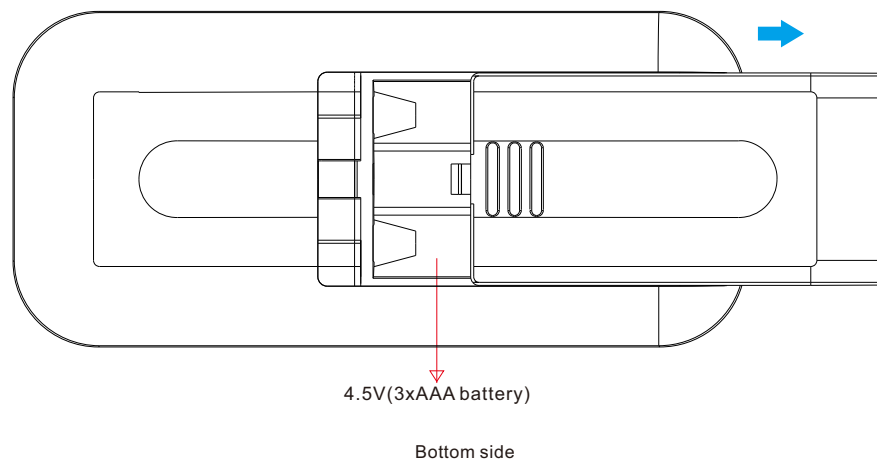

Important: Read All Instructions Prior to Installation

Function introduction

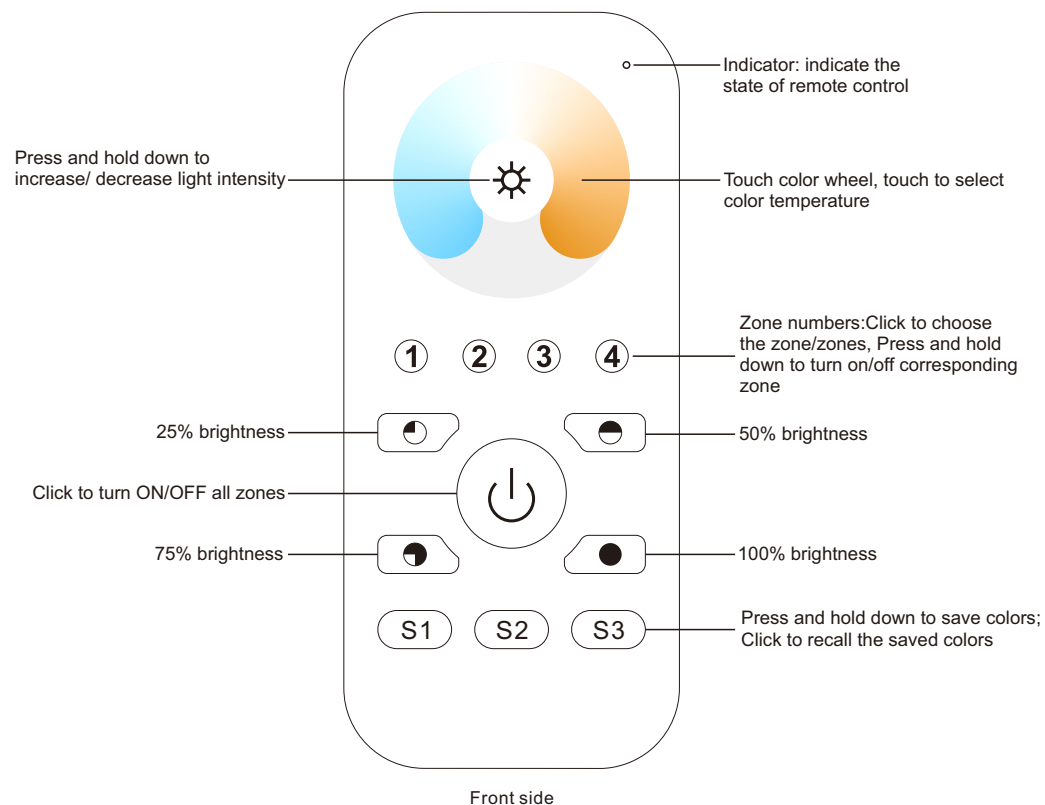

Product Data

Output	2.4G Mesh signal
Operation Frequency	2.4GHz
Power Supply	4.5V(3xAAA battery)
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	120x55x17mm


- Control 4 zones of 2.4G mesh receivers separately.
- CCT color controller
- High sensitive & high stable, fast & precise CCT color control.
- Compatible with all universal series 2.4G mesh receivers
- 1 receiver can be paired by max 8 different remote controls.
- Waterproof grade: IP20

Safety & Warnings

- This device contains AAA batteries that shall be stored and disposed properly.
- DO NOT expose the device to moisture.

Pair with 2.4G Mesh Receiver

Step 1: Do wiring the receiver according to wiring diagram (please refer to the instruction of 2.4G mesh receiver that you would like to pair with).

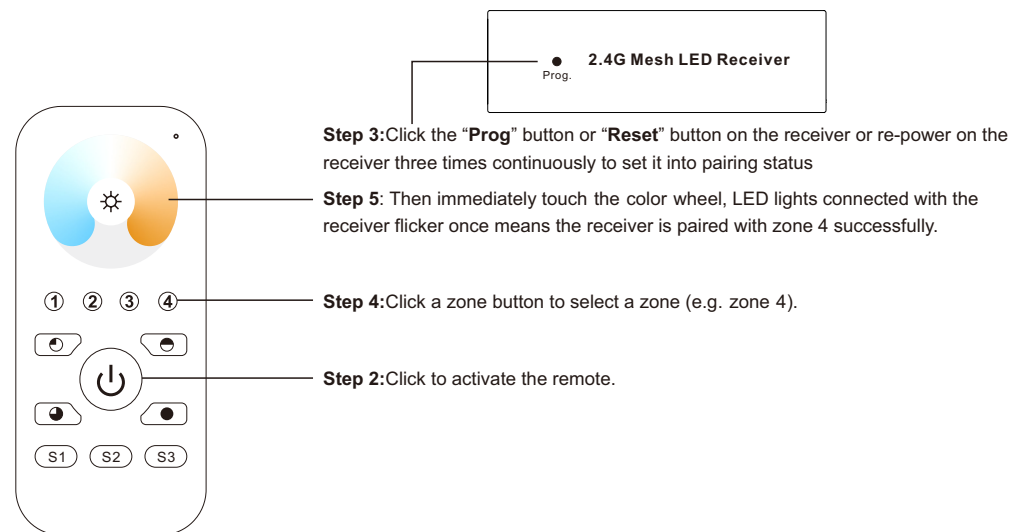

If you use multiple receivers, you have two choices:


Option 1: have all the receivers in the same zone, like zone 1



Option 2: have each receiver in a different zone, like zone 1, 2, 3 or 4



Save color/scene/mode

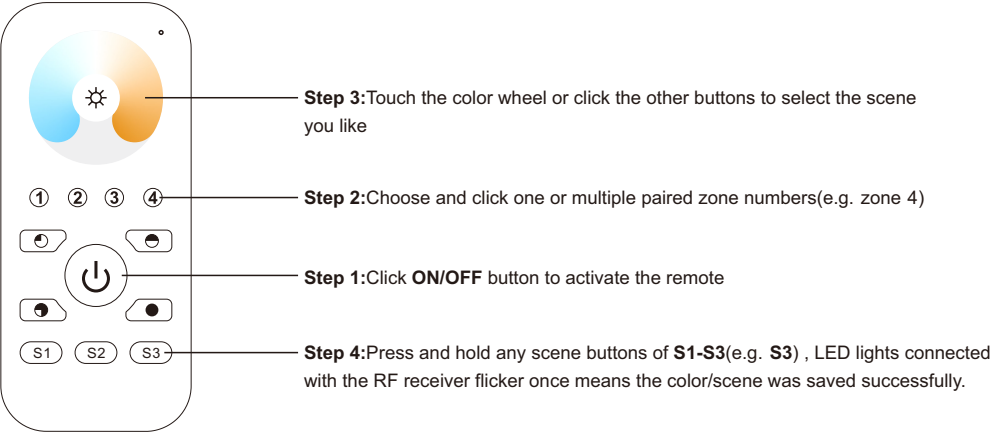

Recall the saved colors/scenes

